





The **DIGITAL MONITOR PANEL** has two automatic learn features and it will learn:

1. If the Water and Waste Tanks have 1/3 or 1/4 increment sensors.
2. If LP Sensor exists.

Each feature above is learned independently, even for the individual Tanks.

Once a feature is learned, it is stored in non-volatile memory, and remembered even if Battery Power is removed from the Panel.

The **DIGITAL MONITOR PANEL** has many safe guards to prevent improperly learning a feature. Should the Panel learn something incorrectly, an option exists on the Panel to reset the original factory default, so that the Panel can re-learn the proper features.

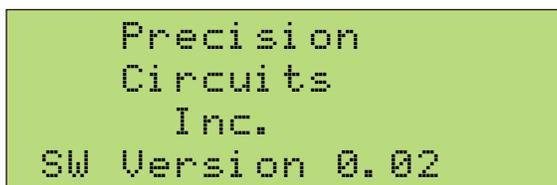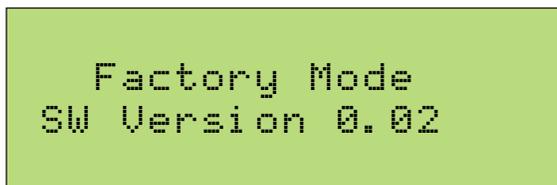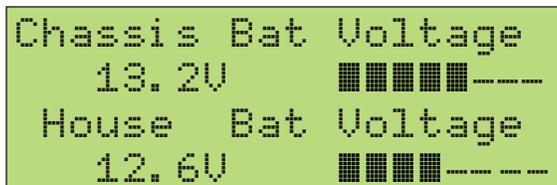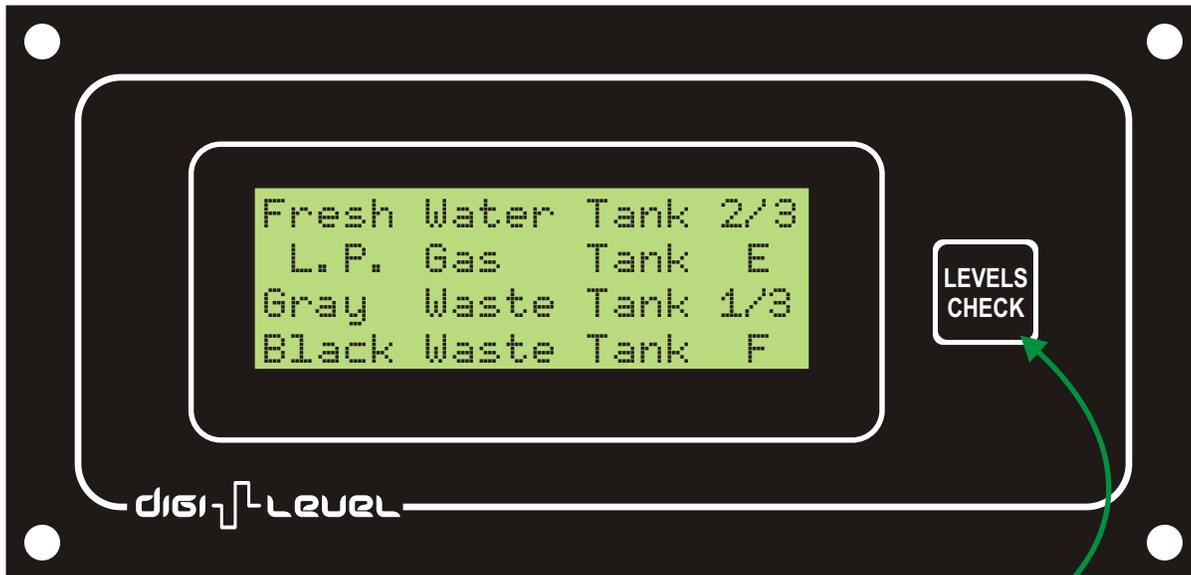

To Reset the Panel to Default

1. Touch LEVELS CHECK as many times as needed to get to the above screen.
2. Press **And Hold** LEVELS CHECK button for approximately 6 seconds. The screen to the left appears right away, but continue holding the button.
3. Once Factory Mode screen appears, (shown to the left), release LEVELS CHECK, and quickly press and release again.
4. If done properly, screen to the left should appear. Factory Default settings have been reset and Panel is going through Power-up screen. If not, go back to step #1.