



### KEY FEATURES:

**DIGI-LEVEL** is a revolutionary new monitoring system. All water level sensing is done at the tank. The Tank Sensor features field effect technology. Each Sensor array contains three sensors which glue to the outside of the tank, at the position and level that the water is to be sensed, thus eliminating the need for calibration. Each Sensor emits an electric field into the tank. When the water level passes by the Sensor, it detects a change in its electric field. The Tank Sensor then communicates the level information to the Monitor Panel. Just two wires are required for both power and communication.

The **DIGI-LEVEL** also has a universal Generator control, which will integrate with most gas and diesel generators. The Hour Meter displays while pressing the Check switch or while the generator is running.

The system uses a printed circuit board, and is completely connectorized. This assures consistency of performance and ease of installation.

- Improved Reliability
- Increased Accuracy
- Available Diagnostic Equipment
- All Connectorized
  
- All Sensing Done at Tank
- No Calibration Required
- Tank Sensor Communicates to Panel
- Eliminates Probes
- Operates with a wide range of Water
- Simplifies wiring
  
- Universal Generator Control
- Hour Meter on with Check Switch
  
- Available Companion Switch Panels
- Family Look Switches

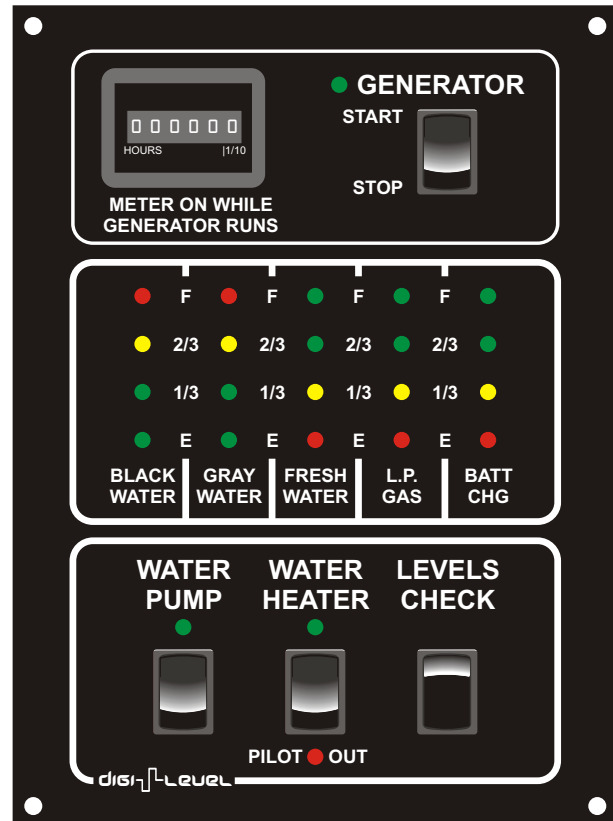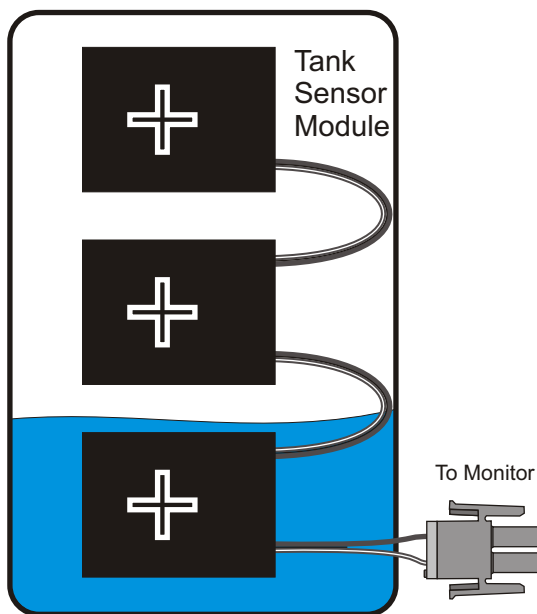

**DIGI-LEVEL CENTRAL MONITOR PANEL**

## *A New Generation of Tank Level Sensing*

**Operation:**

**DIGI-LEVEL** senses the Water Level right at the Tank. The Tank Sensor is a fully sealed module which houses the level sensing electronic integrated circuitry. The Tank Sensor adheres to the polymer tank wall with high-grade long life adhesive provided with the Tank Sensor. The tank wall must be clean, dry, and free from oil and lubricants. The surface flatness and smoothness are very important, both for good adhesion life, and sensor operation. It is important that neither gaps nor air bubbles are present between the sensor and tank wall. Sensors and Tanks should be at room temperature when adhering. No metallic or conductive materials should be near the sensor either inside or outside the tank.

The Tank Sensor communicates the tank level to the Monitor Panel on the power wire requiring only two wires from each tank to the Monitor Panel . The Monitor Panel also displays the level of LP and Battery Voltage. All the wiring is self protected, and will not be damaged if mis-wired.

The Generator has a universal connector which will operate most Gas and Diesel Generators including pre-heat. It is not necessary to run the Generator to view the Hour Meter. The Hour Meter display turns on when the Levels Check switch is pressed. The Hour Meter display turns on and the clock is ticking, when the generator is running.

**Specifications:**

Part Numbers: 00-10010-200 DIGI-LEVEL SENSOR MONITOR PANEL W/WATER HEATER SW  
 00-10010-300 DIGI-LEVEL SENSOR MONITOR PANEL NO WATER HEATER SW  
 00-10023-000 DIGI-LEVEL TANK SENSOR ARRAY

J1 Connector 1-480700-0 Amp Universal Mate-N-Lok Plug 3 Position  
 Pin-1 Water Pump Remote Switch Leg 1; No Connect when no Remote  
 Pin-2 To Water Pump  
 Pin-3 Water Pump Remote Switch Leg 2; Power when no Remote

J2 Connector 39-01-2120 Molex Mini-Fit Jr. Connector 12 Circuit Receptacle Housing  
 Pin-1 LP Tank Signal Pin-7 Fresh Water Tank Signal  
 Pin-2 LP Tank Ground Pin-8 Fresh Water Tank Ground  
 Pin-3 Gray Water Tank Ground Pin-9 Gray Water Tank Signal  
 Pin-4 Water Heater Pilot Out Indicator Pin-10 Panel Ground  
 Pin-5 Black Water Tank Ground Pin-11 Black Water Tank Signal  
 Pin-6 Battery Panel Power Pin-12 Water Heater Switched Power

JP1 Connector 39-01-2080 Molex Mini-Fit Jr. Connector 8 Circuit Receptacle Housing  
 For Different Gen-Set Wiring See Wiring Diagram

Environment: Indoor, Out of direct weather  
 Dimensions: 6-1/4" wide, 8-1/2 " high, 1-1/2" deep  
 Panel Cutout 5-1/2" wide, 7-3/4" high (centered);  
 Mounting Holes 3/16" diameter, 3/16" in from four corners.

	Minimum	Typical	Maximum
Volts DC	9.0VDC	12.0VDC	16.0VDC
Water Pump Switch			15.0 Amps
Water Heater Switch			10.0 Amps
Generator Switch			5.0 Amps
Ambient Temperature	-40°C		+85°C