


## PCS CENTRAL MONITOR PANEL

### Procedure to Clear RV DATA & return MONITOR to Blank Factory Default:





This procedure would be performed in order to clear the **CENTRAL MONITOR PANEL** in cases where it contains incorrect **RV DATA**, and to restore it to factory default or blank settings.

Warning, once cleared the **RV DATA** is lost and can only be restored by connecting the **MONITOR** back to the **PCS CONTROLLER** with the required **RV DATA**.

The **PCS CENTRAL MONITOR PANEL** has three buttons on the front, Up, Set, & Down. The **MONITOR** must be removed from the wall by removing the four corner screws, in order to obtain access to the RJ11 telephone type Data Cable in the back of the **MONITOR**. Ensure **MONITOR** is powered and operating before attempting the reset procedure.

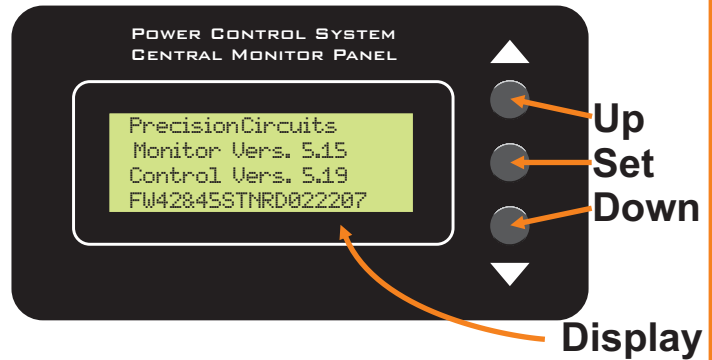

1. Press and hold all three buttons, Up, Set, and Down.
2. Unplug RJ11 telephone type data cable from the back of the **CENTRAL MONITOR PANEL**.  
Look to see that the screen goes blank.
3. Plug the RJ11 cable back in.  
For the first 3 seconds, you will see the screen to the right.  
(Continue holding the buttons)
4. After approximately 3 seconds the screen to the right should appear.  
Release all 3 buttons once screen appears and quickly perform step 5.
5. Momentarily press and release the middle Set button.  
(This screen will disappear within 5 secs . If you have not pressed the Set button quick enough, you must start again from step 1.)
6. Once this screen appears the task is successfully completed.

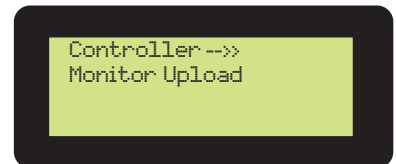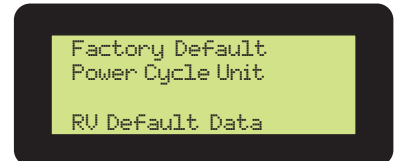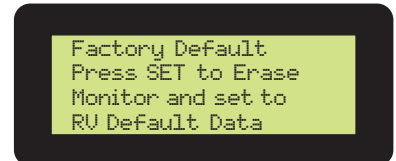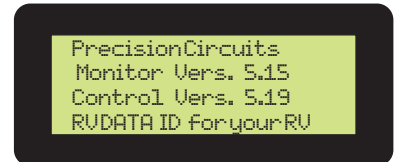

Next time the **MONITOR** is connected to a **PCS CONTROLLER**, which has valid **RV DATA**, the **CONTROLLER** will teach the **MONITOR** its **RV DATA** and the screen to the right will momentarily appear.