



Digi-Level Tank Recalibration

Winnebago Ekko Models 622A and 624C display tank readings in 1% increments. Each tank can be individually recalibrated. If a tank is still showing a small percentage of water when it is empty or never reaching 100% when the tank is full, you can recalibrate the tank for more accurate readings. Recalibration should only be done when a tank is empty. Recalibrating a tank while there is still water inside will cause inaccurate readings.

Recalibration is done from the Settings screen. To get to the settings screen, drag your finger down from the top center of your touch screen as shown with the red arrow below. Then press the revealed "Settings" button.

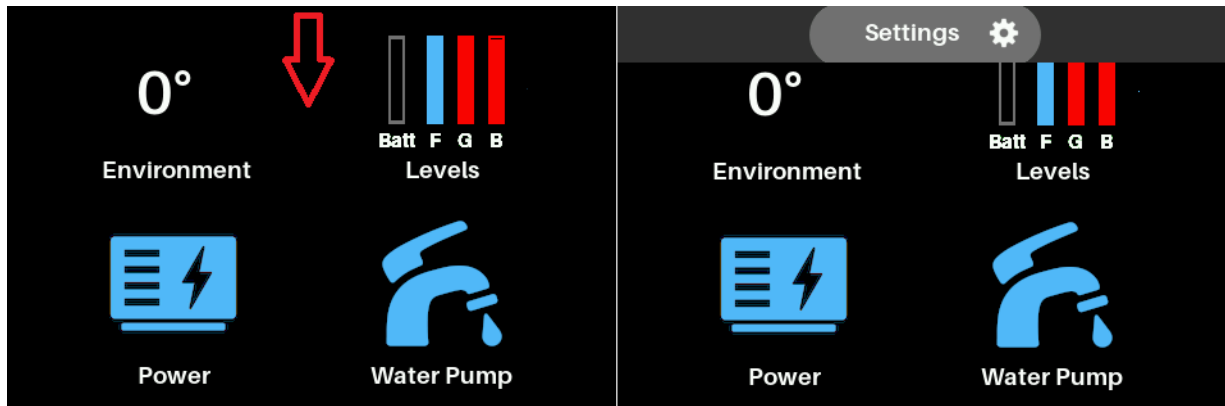

"Recalibrate Tanks" will be in the lower center of the screen, or lower right if you have a generator.

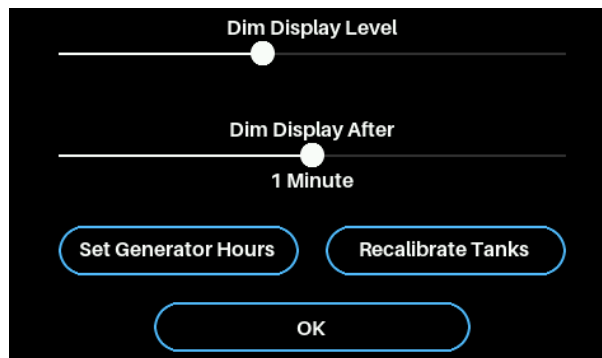

Tanks can be recalibrated individually by pressing the “Fresh”, “Gray”, or “Black” buttons. Remember, the tank must be fully empty before it can be calibrated.



To restore all your tanks to their original factory calibration levels, press the “Factory Defaults” button. The Factory Defaults option can be selected at any time, even if one or more of the tanks are not empty.